

MOULDED AND FLUSH WOOD  
COMPOSITE INTERIOR DOORS



JELD WEN®

# JELD-WEN® INTERIOR DOORS INVITE LASTING BEAUTY AND STYLE INTO ANY SPACE

Bring home elegance and style with JELD-WEN®'s flush and moulded interior doors. Combining beauty and performance, they are available in a variety of styles and finishes, including smooth or textured woodgrain, and they come primed, so you can easily paint and customize. Plus, JELD-WEN flush doors are available in three beautiful wood species. Come find the perfect door to suit the unique architecture of your home.

## COASTAL



### ■ MONROE™ SMOOTH

Monroe™ lets you add the sleek, contemporary feel homeowners are looking for without the added cost.

#### Square Sticking

- Left: 8'0" (2438 mm) Passage Door
- Top Right: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door
- Bottom Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold

*Additional options not shown:  
8'0" (2438 mm) bifold*



### ■ BIRKDALE™ SMOOTH

The Birkdale™ offers a distinct design that provides the chic ambiance of craftsman stile and rail construction, in a moulded door. For homeowners who seek an avant-garde door without the added cost, consider the Birkdale.

#### Square Sticking

- Left: 8'0" (2438 mm) Passage Door
- Top Right: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door
- Bottom Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold



### ■ ROCKPORT® SMOOTH

Authentic design comes home with the Rockport® moulded interior door. This five-panel door features a smooth surface and endless good looks, making it ideal for any home and any décor.

#### Cove and Bead Sticking

- Left: 8'0" (2438 mm) Passage Door
- Top Right: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door
- Bottom Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold

# MODERN



## ■ MADISON SMOOTH

The Madison is a classic design with clean lines that will complement any architectural style. Equally comfortable in traditional or contemporary settings, this design is sure to accentuate any interior décor.

### Square Sticking

Left: 8'0" (2438 mm) Passage Door  
Top Right: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door  
Bottom Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold

*Additional options not shown:  
8'0" (2438 mm) bifold*



## ■ CONMORE® SMOOTH

An authentic moulded, flat five-panel door will create lasting elegance in any space. Pair with wainscoting for an authentic look.

### Stepped Sticking

Left: 8'0" (2438 mm) Passage Door  
Top Right: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door  
Bottom Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold

# TRADITIONAL



## ■ CAMDEN® TEXTURED

Sleek and modern yet timelessly elegant, the Camden® door elevates any room with a traditional arched top and textured surface.

### Cove and Bead Sticking

Left: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door  
Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold




## ■ CARRARA® SMOOTH

Artistry and sophistication set the Carrara® door apart from the ordinary. Its simple panel design adds depth and interest to complement most architectural styles.

### Cove and Bead Sticking

Left: 8'0" (2438 mm) Passage Door  
Top Right: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door  
Bottom Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold

*Additional options not shown:  
8'0" (2438 mm) bifold*

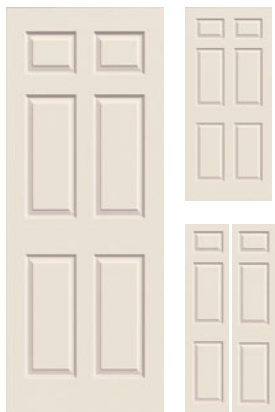

## ■ COLONIST® TEXTURED

With its textured woodgrain finish, the Colonist® textured offers a perfect blend of functionality and charm.

### Cove and Bead Sticking

Left: 8'0" (2438 mm) Passage Door  
Top Right: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door  
Bottom Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold

*Additional options not shown:  
8'0" (2438 mm) bifold*



## ■ SANTA FE SMOOTH

Designed and built with a southwestern flavour, the Santa Fe is a moulded interior door with a smooth surface that does well in most modern homes.

### Ovolo Sticking

- Left: 8'0" (2438 mm) Passage Door
- Top Right: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door
- Bottom Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold

*Additional options not shown:  
8'0" (2438 mm) bifold*



## ■ CRAFTSMAN III™ SMOOTH

One of our most popular doors, the Craftsman III™ is the ultimate door for those seeking to have it all: clean lines, classic architecture and a design that makes this door the understated focus of any room.

### Square Sticking

- Left: 6'8" (2032 mm) / 7'0" (2134 mm) Passage Door
- Right: 6'8" (2032 mm) / 7'0" (2134 mm) Bifold

## ■ STICKING PROFILES



Cove and Bead Sticking    Ovolo Sticking    Square Sticking    Stepped Sticking

## ■ SURFACES



Smooth    Textured

# COUNT THE BENEFITS OF FLUSH WOOD COMPOSITE

For a stylish interior, try a flush wood composite interior door. Our flush doors feature flat surfaces, front and back, for a classy mid-century modern appearance.

## ■ SMOOTH SIMPLICITY

Our flush interior doors are available in a range of woodgrain patterns. The veneer samples shown represent only a small offering of the unfinished hardwood veneer species we offer. In addition to these options, we provide a selection of sizes. Our flush doors come in widths of 1'0" (305 mm) through to 4'0" (1219 mm) and heights of 6'8", 7'0" and 8'0" (2032 mm, 2134 mm and 2438 mm).

*Ask your local dealer about the bifold panel sizes available*



## ■ FINISHES

Flush interior doors are available in a wide range of woodgrains.



MAHOGANY    WHITE BIRCH    SLICED RED OAK    PRIMED HARDBOARD

*Regional availability. See an associate for details.*

# PROCORE

THE QUIET DOOR®

Every JELD-WEN® flush and moulded interior door is available with multiple construction options. Compared to hollow-core options, solid-core construction creates quiet and peaceful indoor spaces by reducing sound transmission by up to 50% and they are more resistant to dings and impact damage, making them ideal for high-traffic areas. Solid particleboard and mineral core doors offer durability, security and soundproofing with fire ratings of 20, 45, 60 or 90-minutes when paired with certified frames and hardware.



## DOOR CONSTRUCTION

### Hollow Core



**1 3/8" (35 mm) Door**  
**1 3/4" (45 mm) Door**  
 Blocking behind panels for support



**SOUND RESISTANCE RATING**  
 1 2 3 4 5 6 7 8 9 10  
 Loud Quiet

### Solid Particleboard Core



**1 3/8" (35 mm) Door**  
**1 3/4" (45 mm) Door**  
 20-minute fire rating available for 1 3/4" (45 mm) up to 3'0" x 8'0" (914 mm x 2438 mm)



**PROCORE**  
 THE QUIET DOOR®



**SOUND RESISTANCE RATING**  
 1 2 3 4 5 6 7 8 9 10  
 Loud Quiet

### Solid Mineral Core



**1 3/4" (45 mm) Door**  
 45 minute\* fire ratings up to 3'0" x 8'0" (914 mm x 2438 mm)



\*45 to 90-minute fire rating for flush doors.



**SOUND RESISTANCE RATING**  
 1 2 3 4 5 6 7 8 9 10  
 Loud Quiet

Sound resistance ratings may vary based on door construction options selected.

## FIRE RATING

Our 1 3/4" (45 mm) moulded doors are available with 20 or 45-minute fire ratings. Flat panel moulded interior doors only available with 20-minute fire rating. Our flush doors also available with 20, 45, 60 or 90-minute fire ratings. Door slabs must be used with fire-rated door systems for true fire protection. A door system consists of a door slab, frame, hardware and components.

# JELD-WEN®

The JELD-WEN® website is your ultimate resource for learning about our reliable windows and doors. It has all the product information and design advice you need.

JELD-WEN reserves the right to change product specifications without notice.  
Please check our website for current information: [www.jeld-wen.ca](http://www.jeld-wen.ca)

---

Follow us online



[jeld-wen.ca](http://jeld-wen.ca)

01C-008A  
01/24  
CN, ON, QC, AT  
Printed in Canada